

SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 external walls, GF + FF to the wall plate, ICF on the slab, plus the front gables - pre-cut by BuildEase, stock forms and accessories by the distributor. The slab, floors, steels, stairs, roof, partitions, windows, chimney and porch are DESIGN ASSUMPTIONS drawn in good faith for coordination only (England - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

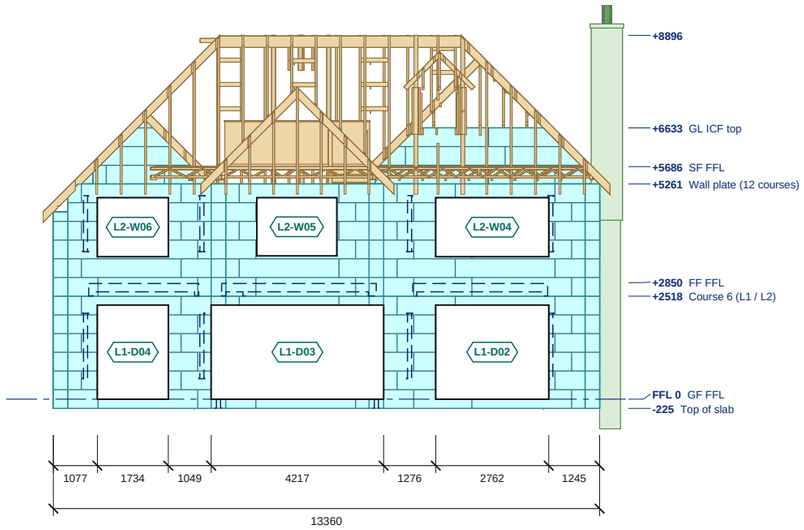

REAR (WEST) ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

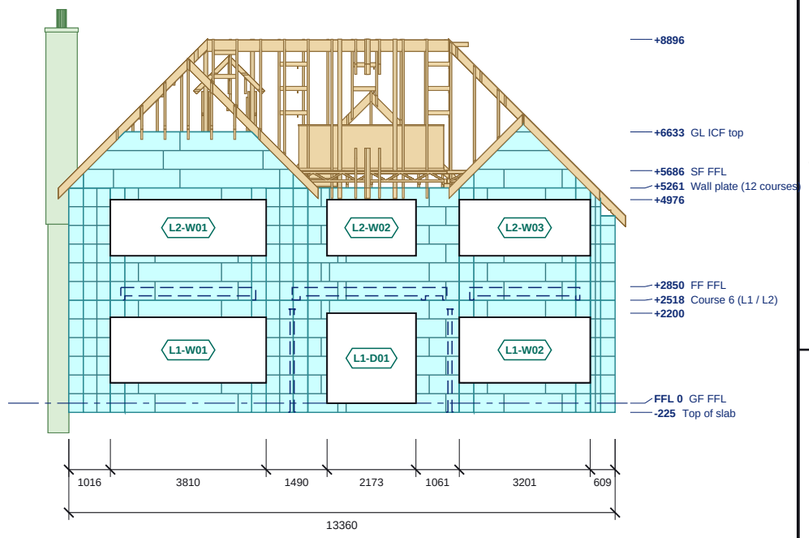

FRONT (EAST) ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule



ELEVATION SCHEDULES

REAR (WEST) ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-D03	4216	2300	0	+2300	-
L1-D02	2762	2300	0	+2300	-
L1-D04	1734	2300	0	+2300	-
L2-W05	1955	1420	+3505	+4925	-
L2-W04	2762	1440	+3485	+4925	-
L2-W06	1734	1440	+3485	+4925	-

Structural openings in the ICF; sill and head above GF FFL.

FRONT (EAST) ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-W01	3810	1600	+500	+2100	-
L1-W02	3200	1600	+500	+2100	-
L1-D01	2173	2200	0	+2200	-
L2-W01	3810	1370	+3605	+4975	-
L2-W03	3200	1370	+3605	+4975	-
L2-W02	2173	1370	+3605	+4975	-

Structural openings in the ICF; sill and head above GF FFL.

LEVELS ON THESE ELEVATIONS

Level	FFL
Top of slab	-225
GF FFL	0
top of ICF	+2200
Course 6 (L1 / L2)	+2518
FF FFL	+2850
top of ICF	+4976
Wall plate (12 courses)	+5261
SF FFL	+5686
GL ICF top	+6633
top of roof build-up	+8896

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Steel shown as modelled.
4. See ES26-075-GA-01 for plan setting out, lintels and steel.
5. Datum: 0 = top of slab (ICF starts on the slab, no footing blocks); GF FFL = +225 (150 PIR + 75 screed inside the ICF).
6. Rev A: walls fitted to Nudura Bond (203 increments) - overall width 13,360, runs within about 100 of the drawing; architect to confirm.
7. From Offset Architects 9172-SK10 Plot 1 Plans and Elevations (PRELIMINARY, July 2026).

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue
A	05.11.26	Revised to ICF Supplies review

Nudura™ BuildEase

CLIENT	PROJECT
ICF Supplies Ltd (distributor) - Tom Barrett	Plot 1, The Rectory, Bates Hill, Ightham TN15 9BG

DRAWING TITLE

FRONT AND REAR ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:150	A3	05.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-075-EL-01	A

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.