
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 external walls, GF + FF to the wall plate, ICF on the slab, plus the front gables - pre-cut by BuildEase, stock forms and accessories by the distributor. The slab, floors, steels, stairs, roof, partitions, windows, chimney and porch are DESIGN ASSUMPTIONS drawn in good faith for coordination only (England - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

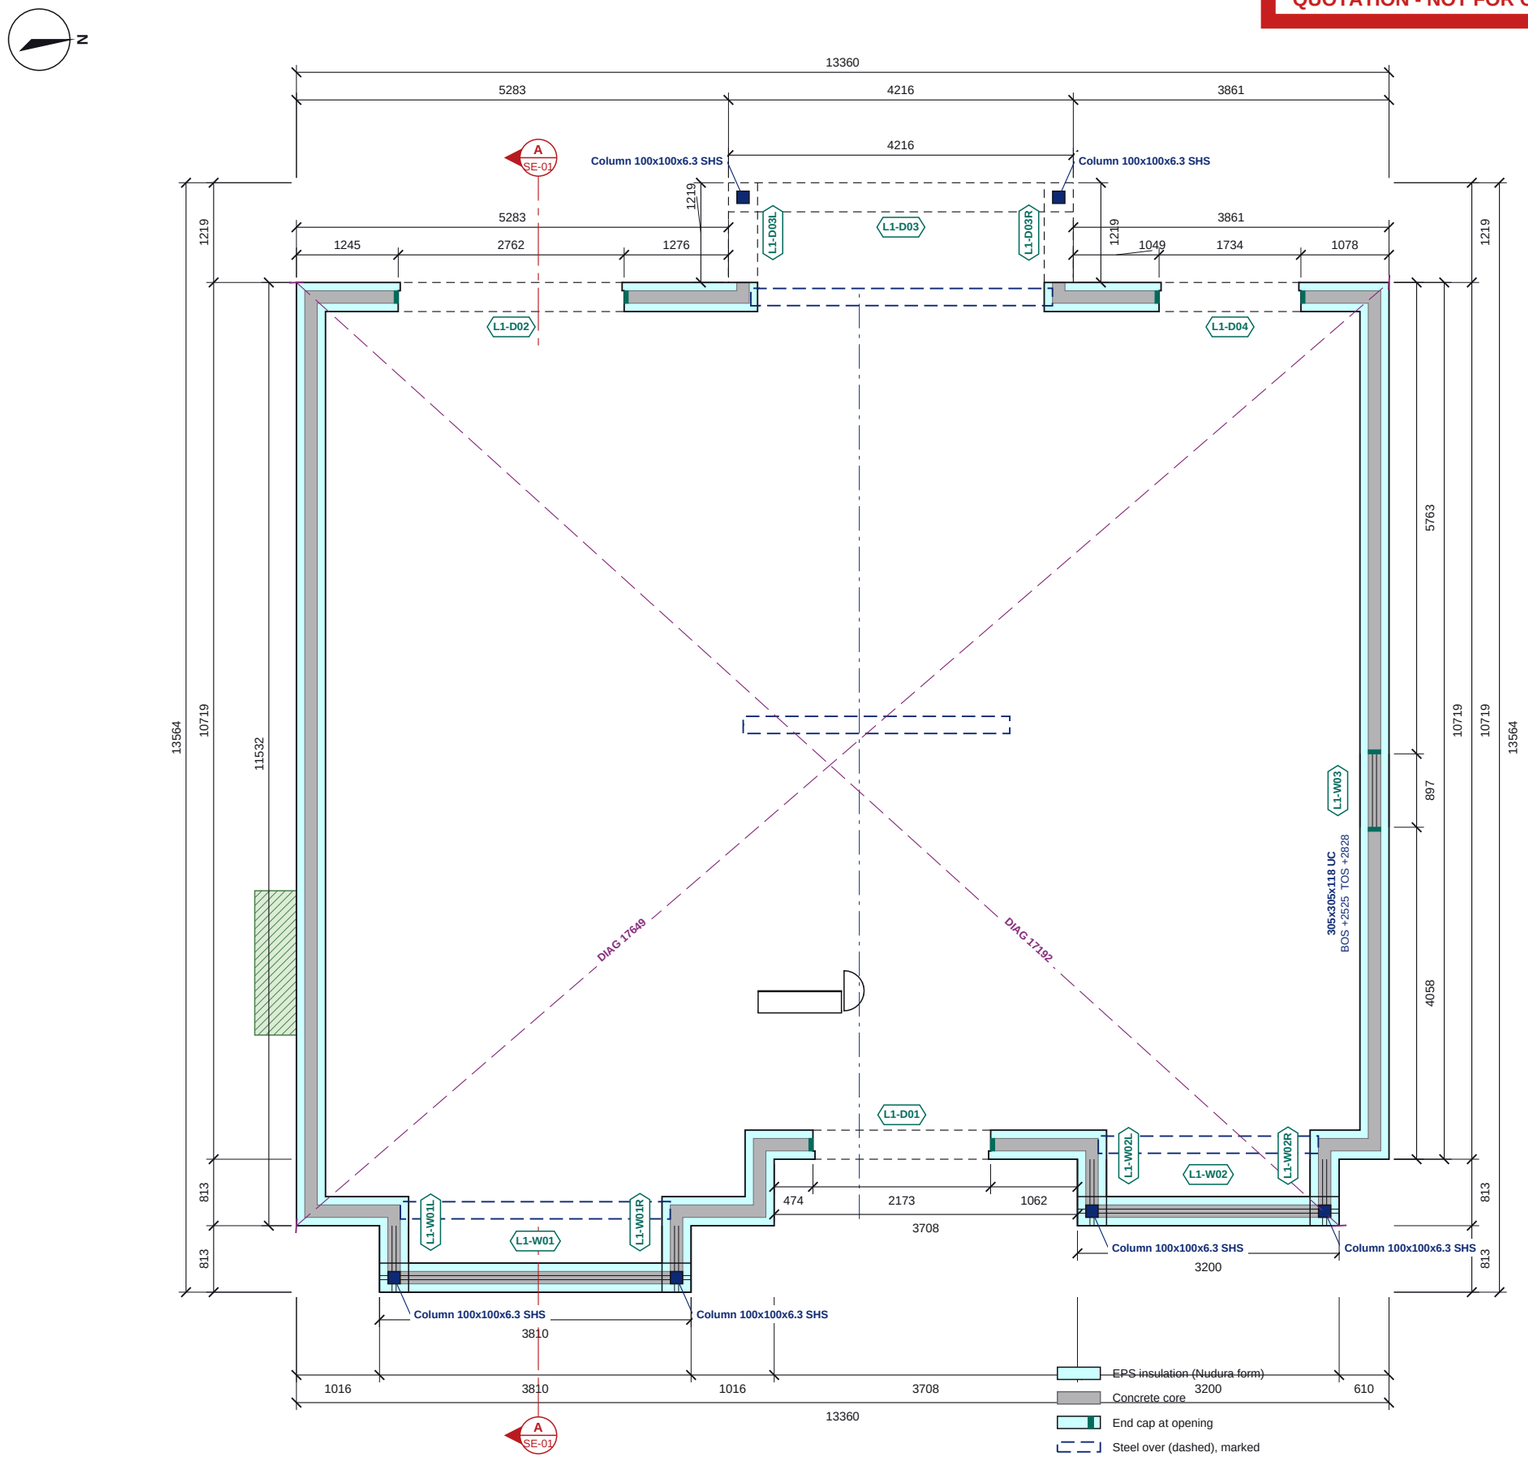

GROUND FLOOR (ON SLAB) ICF PLAN

Scale 1:75 @ A3 | Plan cut at +375

0 1 2 3 4m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

GROUND FLOOR (ON SLAB) ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
L1-D01	2173	2200	0	+2200	-
L1-D02	2762	2300	0	+2300	-
L1-D04	1734	2300	0	+2300	-
L1-W03	897	1650	+450	+2100	-
L1-W01	3810	1600	+500	+2100	-
L1-W01L	813	1600	+500	+2100	-
L1-W01R	813	1600	+500	+2100	-
L1-W02	3200	1600	+500	+2100	-
L1-W02L	813	1600	+500	+2100	-
L1-W02R	813	1600	+500	+2100	-
L1-D03	4216	2300	0	+2300	-
L1-D03L	1219	2300	0	+2300	-
L1-D03R	1219	2300	0	+2300	-

Structural openings in the ICF; sill and head above GF FFL.

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
-	305x305x118 UC S355	+2525	+2828
-	100x100x6.3 SHS S355	+500	+2100
-	100x100x6.3 SHS S355	+500	+2100
-	100x100x6.3 SHS S355	+500	+2100
-	100x100x6.3 SHS S355	+500	+2100
-	100x100x6.3 SHS S355	-225	+2300
-	100x100x6.3 SHS S355	-225	+2300

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design issued. 6in XR35 (152 core) external walls from the architect's preliminary plans; reinforcement, lintels over the wide bay / door openings, the oversailing left gable and the mix for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
7. Datum: 0 = top of slab (ICF starts on the slab, no footing blocks); GF FFL = +225 (150 PIR + 75 screed inside the ICF).
8. Rev A: walls fitted to Nudura Bond (203 increments) - overall width 13,360, runs within about 100 of the drawing; architect to confirm.
9. From Offset Architects 9172-SK10 Plot 1 Plans and Elevations (PRELIMINARY, July 2026).

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue
A	05.11.26	Revised to ICF Supplies review

Nudura™ BuildEase

CLIENT	PROJECT
ICF Supplies Ltd (distributor) - Tom Barrett	Plot 1, The Rectory, Bates Hill, Ightham TN15 9BG

DRAWING TITLE

GROUND FLOOR ICF GENERAL ARRANGEMENT

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:75	A3	05.11.26
DRAWN	CHECKED	APPROVED
TS		
STATUS	DRAWING No.	REV
QUOTATION	ES26-075-GA-01	A