
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 external walls, GF + FF to the wall plate, ICF on the slab, plus the front gables - pre-cut by BuildEase, stock forms and accessories by the distributor. The slab, floors, steels, stairs, roof, partitions, windows, chimney and porch are DESIGN ASSUMPTIONS drawn in good faith for coordination only (England - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

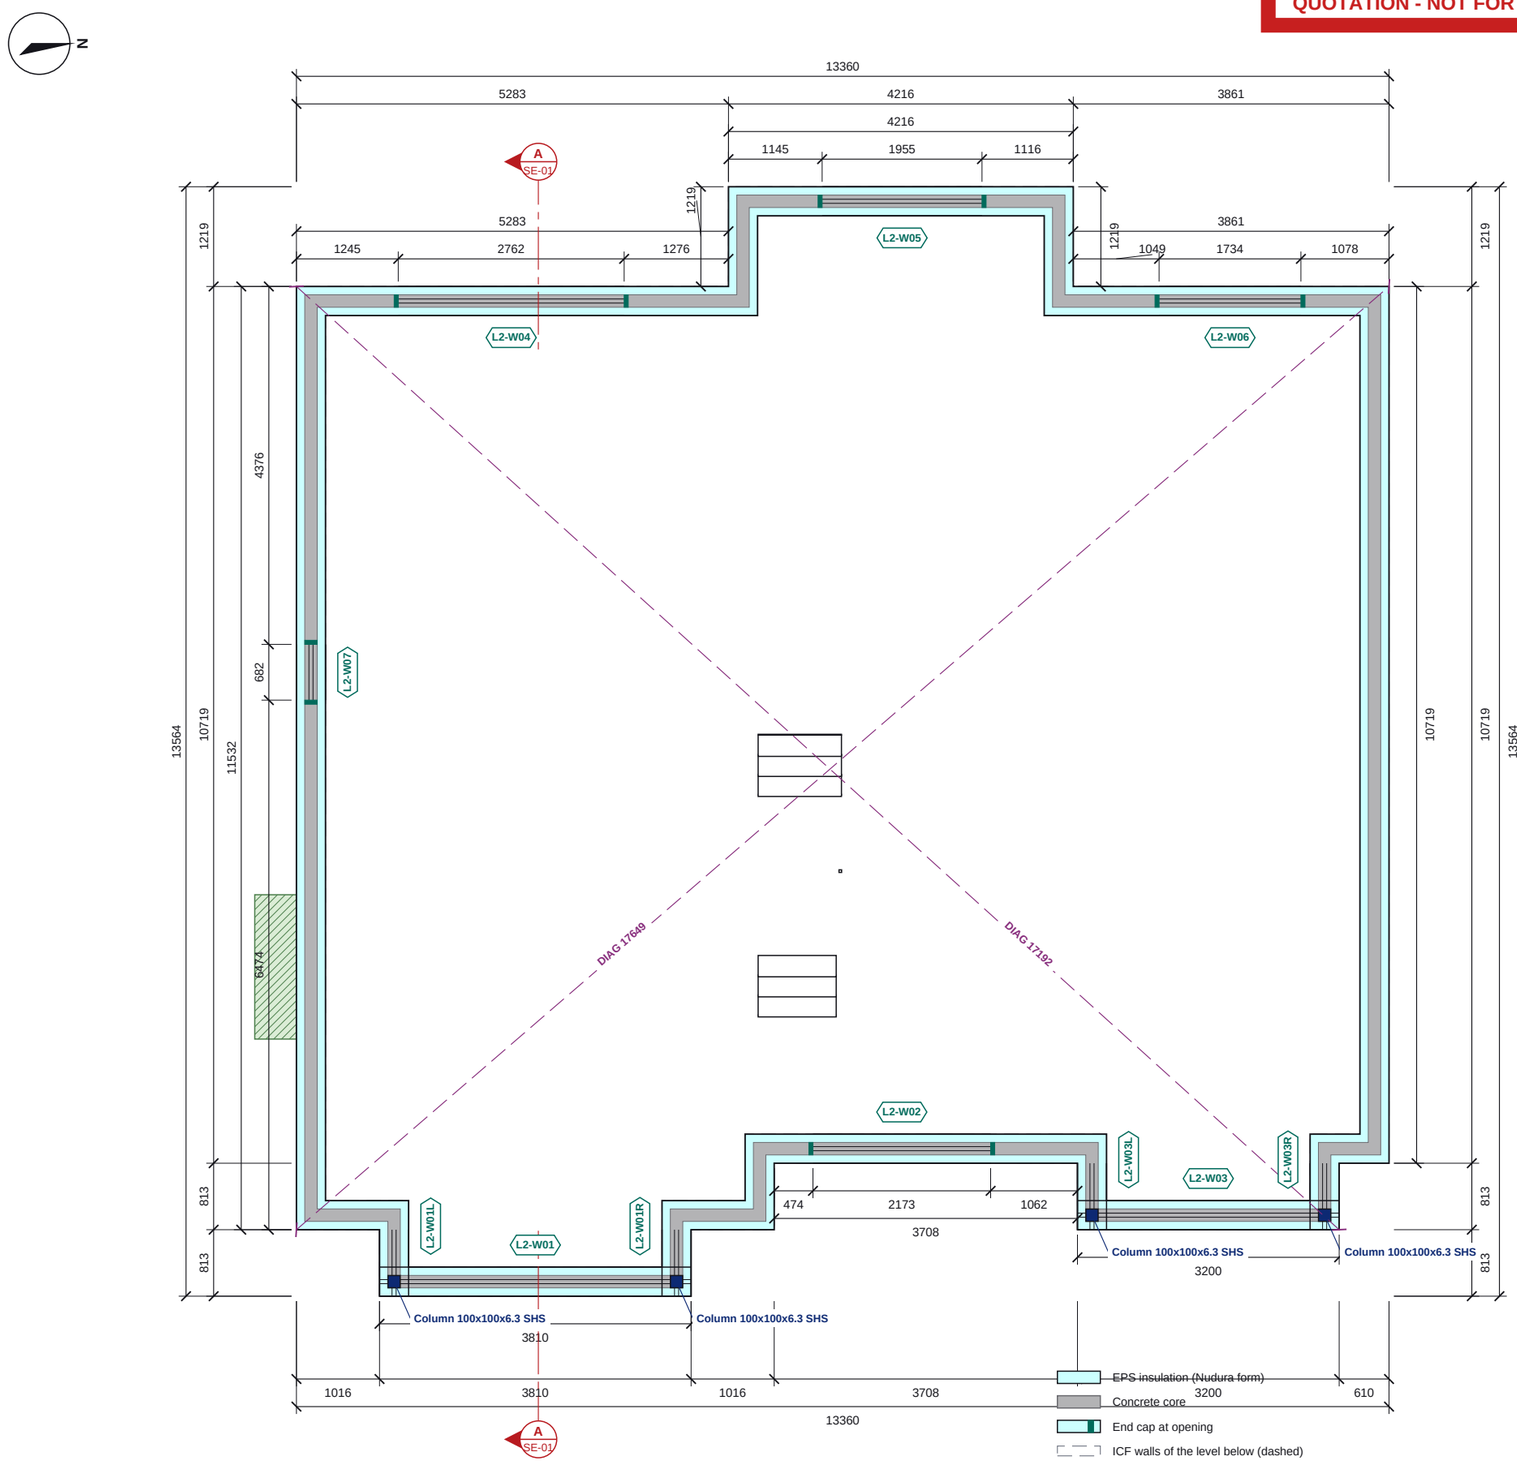

FIRST FLOOR (TO PLATE, 12 CRS) ICF PLAN

Scale 1:75 @ A3 | Plan cut at +3418

0 1 2 3 4m

FIRST FLOOR (TO PLATE, 12 CRS) ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
L2-W02	2173	1370	+3605	+4975	-
L2-W04	2762	1440	+3485	+4925	-
L2-W05	1955	1420	+3505	+4925	-
L2-W06	1734	1440	+3485	+4925	-
L2-W07	682	1400	+3475	+4875	-
L2-W01	3810	1370	+3605	+4975	-
L2-W01L	813	1370	+3605	+4975	-
L2-W01R	813	1370	+3605	+4975	-
L2-W03	3200	1370	+3605	+4975	-
L2-W03L	813	1370	+3605	+4975	-
L2-W03R	813	1370	+3605	+4975	-

Structural openings in the ICF; sill and head above GF FFL.

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
-	100x100x6.3 SHS S355	+3605	+4975
-	100x100x6.3 SHS S355	+3605	+4975
-	100x100x6.3 SHS S355	+3605	+4975
-	100x100x6.3 SHS S355	+3605	+4975

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design issued. 6in XR35 (152 core) external walls from the architect's preliminary plans; reinforcement, lintels over the wide bay / door openings, the oversailing left gable and the mix for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
7. Datum: 0 = top of slab (ICF starts on the slab, no footing blocks); GF FFL = +225 (150 PIR + 75 screed inside the ICF).
8. Rev A: walls fitted to Nudura Bond (203 increments) - overall width 13,360, runs within about 100 of the drawing; architect to confirm.
9. From Offset Architects 9172-SK10 Plot 1 Plans and Elevations (PRELIMINARY, July 2026).

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue
A	05.11.26	Revised to ICF Supplies review

Nudura™ BuildEase

CLIENT	PROJECT
ICF Supplies Ltd (distributor) - Tom Barrett	Plot 1, The Rectory, Bates Hill, Ightham TN15 9BG

DRAWING TITLE

FIRST FLOOR ICF GENERAL ARRANGEMENT

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:75	A3	05.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-075-GA-02	A

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.