
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 external walls, GF + FF to the wall plate, ICF on the slab, plus the front gables - pre-cut by BuildEase, stock forms and accessories by the distributor. The slab, floors, steels, stairs, roof, partitions, windows, chimney and porch are DESIGN ASSUMPTIONS drawn in good faith for coordination only (England - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

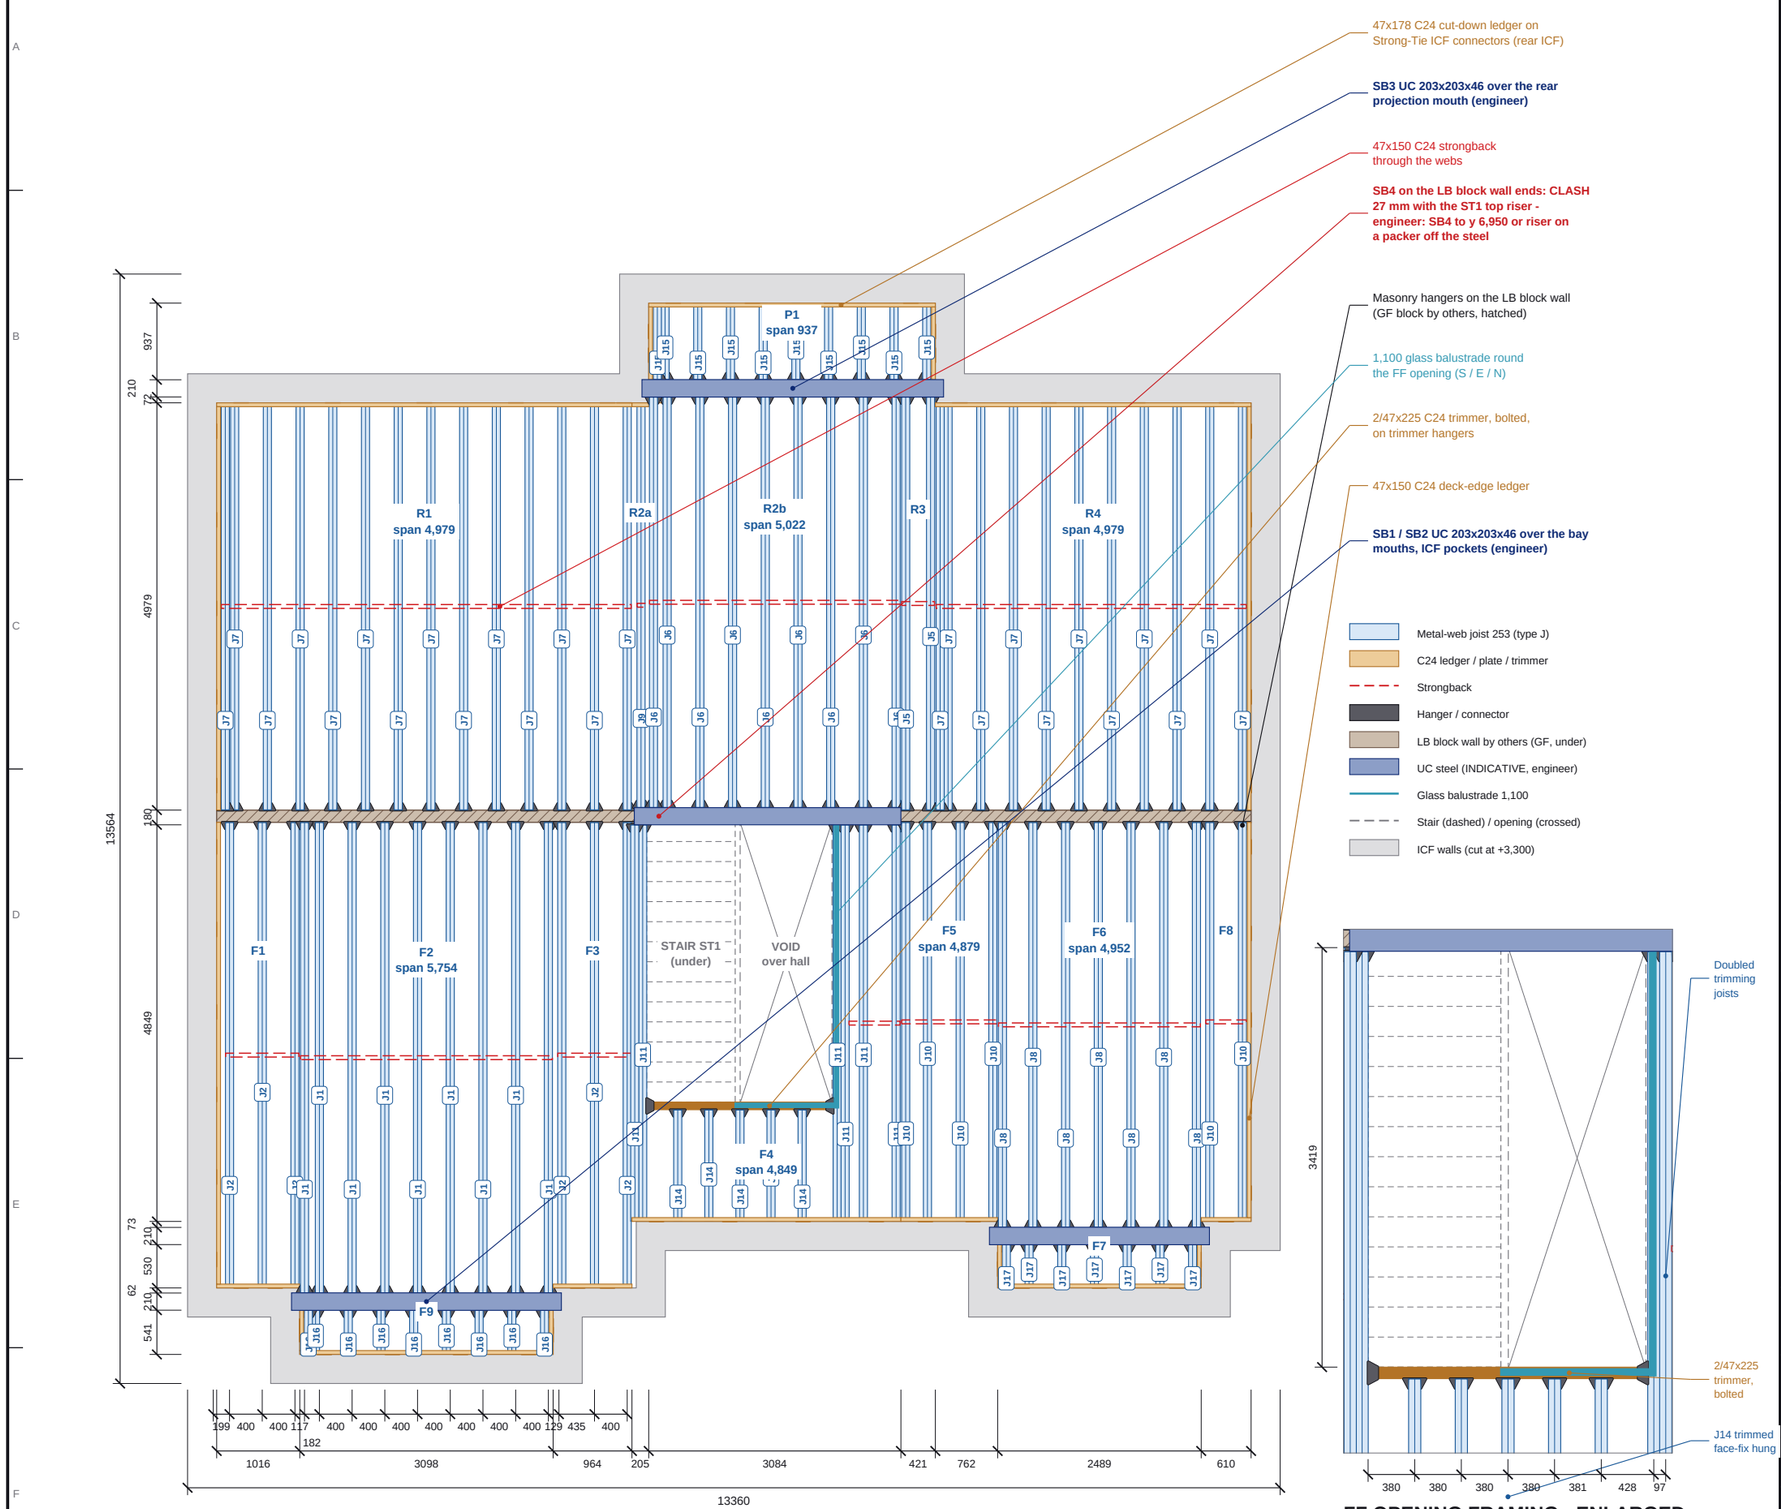

FIRST FLOOR JOIST LAYOUT

Scale 1:75 @ A3 | Plan on the joists, deck omitted

FF OPENING FRAMING - ENLARGED

Scale 1:50 | ST1 + hall void, trimming

FIRST FLOOR SCHEDULES

JOIST SCHEDULE (253 DEEP, @400)

Type	O/A	Bottom	Bearing	Bays	Qty
J1	5,748	5,748	hung both ends	F2	9
J2	5,686	5,639	top-hung + hung	F1, F3	6
J5	5,046	5,046	hung both ends	R3	2
J6	5,016	5,016	hung both ends	R2b	9
J7	4,973	4,926	top-hung + hung	R1, R4	25
J8	4,946	4,946	hung both ends	F6	7
J9	4,943	4,896	top-hung + hung	R2a	1
J10	4,873	4,826	top-hung + hung	F5, F8	6
J11	4,843	4,796	top-hung + hung	F4	6
J14	1,360	1,313	trimmed (hung)	F4	5
J15	931	884	top-hung + hung	P1	10
J16	535	488	top-hung + hung	F9	9
J17	524	477	top-hung + hung	F7	7
	Total				**102**

O/A = top flange overall; Bottom = bottom flange. Includes 4 No. in doubled (bolted) pairs. Types common to both floors; profiles on ES26-075-FL-03.

LEDGERS, STRONGBACKS, TRIMMERS, BINDERS (C24)

Item	Length	Qty	Run m
2/47x225 trimmer, bolted	2,275	1	2.3
47x150 deck-edge ledger	483-5,645	10	24.1
47x150 strongback	97-5,012	12	22.0
47x178 ledger cut-down	205-5,079	11	25.3

METALWORK, DECK AND GUARDING

Item	Qty
Top-chord restraint clip (galv)	75
Strong-Tie ICFVL-CW + ICFLC ICF connector	67
Masonry joist hanger (block walls)	55
Face-fix hanger on timber packer in UC web	69
Face-fix trimmer hanger	2
Face-fix joist hanger off trimmer	5
22 Egger Protect P5 T&G board	200 (131.7 m2)
Glass balustrade 1,100 + base shoe + cap rail (3 runs)	6.0 m

FF STEELS (INDICATIVE - ENGINEER)

Mark	Section	Line	Bearing	Length	kg
SB1	UC 203x203x46 S355	y 987	ICF	3,300	152
SB2	UC 203x203x46 S355	y 1,789	ICF	2,690	124
SB3	UC 203x203x46 S355	y 12,152	ICF	3,688	170
SB4	UC 203x203x46 S355	y 6,921	block	3,260	150
	Total (indicative)				**596**

NOTES

1. FF FFL +3,075: 253 metal-web joists (PS10 equiv., 97x47 C24 flanges) @400 spanning FRONT-REAR (y). ICF ends TOP-HUNG on 47x178 C24 cut-down ledgers; LB block wall ends on masonry hangers (block by others); steel ends on face-fix hangers to timber packers in the UC web.
2. Ledgers on cast-in Strong-Tie ICFVL-CW + ICFLC, ledger top +3,006, joist top +3,053. Deck-edge ledgers, strongbacks at mid-span > 4 m, 22 Egger P5 deck.
3. FF OPENING x 5,656-7,937 / y 3,427-6,846: doubled trimming joists, 2/47x225 trimmer, trimmed joists hung; 1,100 glass guard. ST1 15 x 190 / 245, headroom 2,405.
4. STEELS INDICATIVE - engineer. CLASH: SB4 flange tip y 6,819 is 27 mm inside the ST1 top riser y 6,846: SB4 to y 6,950 or riser on a packer (engineer). Joist supplier to design; pricing only.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue
A	05.11.26	Revised to ICF Supplies review

Nudura™ BuildEase

CLIENT	PROJECT
ICF Supplies Ltd (distributor) - Tom Barrett	Plot 1, The Rectory, Bates Hill, Ightham TN15 9BG

DRAWING TITLE

FIRST FLOOR STRUCTURE

Metal-web joists, ledgers, hangers, strongbacks, FF opening trimming, FF steels

SCALE	SIZE	DATE
AS SHOWN	A3	05.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-075-FL-01	A

Do not scale. All dimensions in mm. Check all dimensions on site.