
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 external walls, GF + FF to the wall plate, ICF on the slab, plus the front gables - pre-cut by BuildEase, stock forms and accessories by the distributor. The slab, floors, steels, stairs, roof, partitions, windows, chimney and porch are DESIGN ASSUMPTIONS drawn in good faith for coordination only (England - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

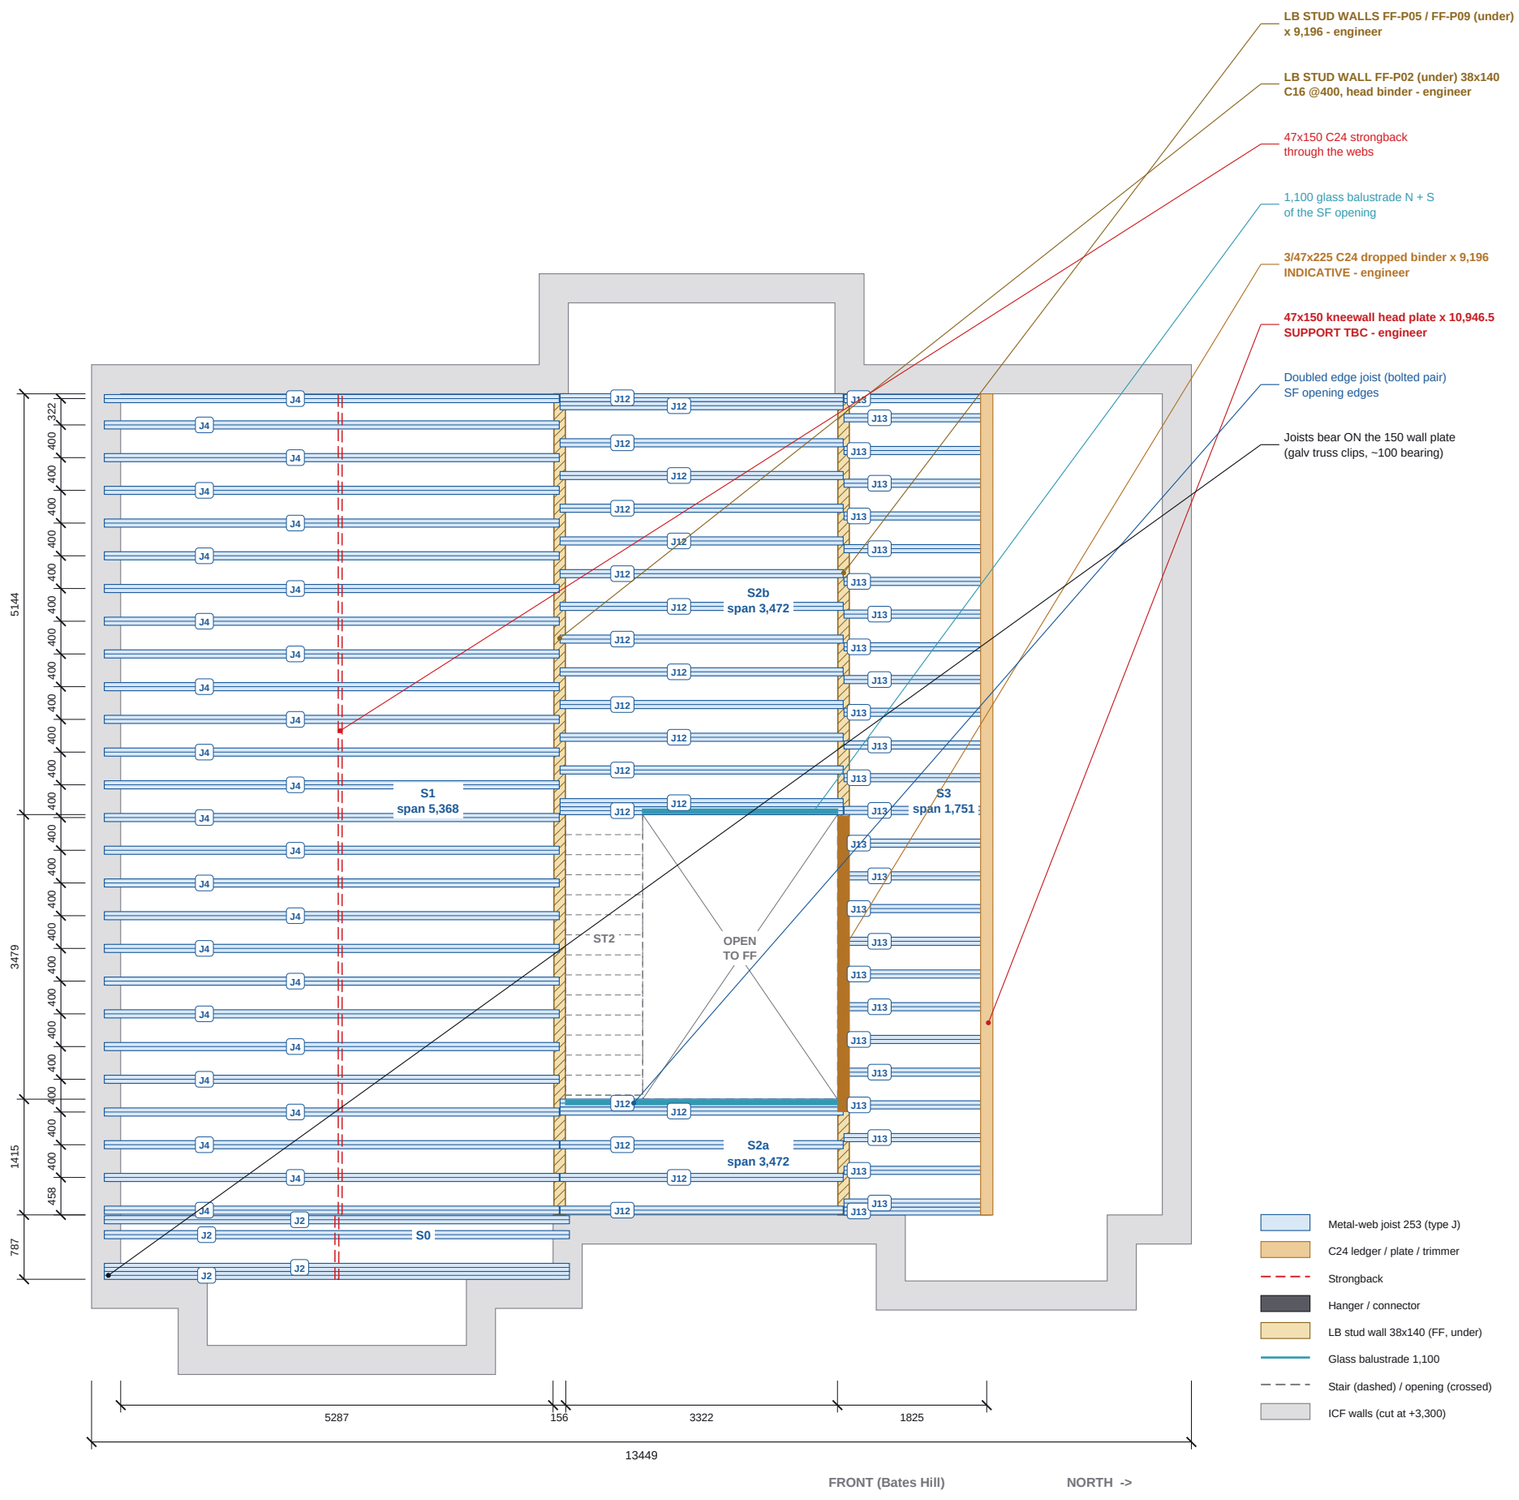

SECOND FLOOR JOIST LAYOUT

Scale 1:75 @ A3 | Plan on the joists, deck omitted

SECOND FLOOR SCHEDULES

JOIST SCHEDULE (253 DEEP, @400)

Type	O/A	Bottom	Bearing	Bays	Qty
J2	5,688	5,688	bottom-bearing	S0	4
J4	5,563	5,563	bottom-bearing	S1	26
J12	3,462	3,462	bottom-bearing	S2a, S2b	20
J13	1,811	1,811	bottom-bearing	S3	27
	Total				**77**

O/A = top flange overall; Bottom = bottom flange. Includes 10 No. in doubled (bolted) pairs. Types common to both floors; profiles on ES26-075-FL-03.

LEDGERS, STRONGBACKS, TRIMMERS, BINDERS (C24)

Item	Length	Qty	Run m
3/47x225 dropped binder (INDICATIVE)	3,609	1	3.6
47x150 kneewall head plate (support TBC)	10,039	1	10.0
47x150 strongback	777-10,019	2	10.8
LB stud wall FF-P02 38x140 C16 @400 (FF, engineer)	10,039	1	-
LB stud wall FF-P05 38x140 C16 @400 (FF, engineer)	5,165	1	-
LB stud wall FF-P09 38x140 C16 @400 (FF, engineer)	1,265	1	-

METALWORK, DECK AND GUARDING

Item	Qty
Truss clip to the 150 wall plate	34
Truss clip to the kneewall head plate	27
Truss clip to the LB stud wall head	93
22 Egger Protect P5 T&G board	96 (98.4 m2)
Glass balustrade 1,100 + base shoe + cap rail (2 runs)	5.7 m

NOTES

1. Second floor FFL +5,911: 253 metal-web joists @400 spanning x (S-N) in bays S0, S1, S2a, S2b, S3, BOTTOM-BEARING on the 150 ICF wall plates and on the LOAD-BEARING FF stud walls FF-P02 (x 5,724) and FF-P05 / FF-P09 (x 9,196): 38x140 C16 @400, head binder, lintels over the FF doors - engineer. Joist top +5,889; galv truss clips at every bearing.
2. SF OPENING x 5,799-9,121 / y 3,366-6,845 (ST2 + void): doubled edge joists, 1,100 glass balustrade N + S. Dropped binder 3/47x225 C24 at x 9,196 over the FF cupboard fronts (y 3,216-6,825) - INDICATIVE, engineer.
3. North edge: 47x150 kneewall head plate at x 10,946.5 - SUPPORT TBC (stud kneewall on the FF floor, hangers off the rafters, or run the joists to the north plate on a 914 packer) - engineer.
4. Joists at the south / front / rear plates sit inside the rafter feet: fix beside the rafters as ceiling ties / cut to the slope (roof framer). S2a is under the front slope - eaves storage only.
5. Joist supplier to design and confirm; for pricing only. Roof over on ES26-075-RF-01.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
ICF Supplies Ltd (distributor) - Tom Barrett	Plot 1, The Rectory, Bates Hill, Ightham TN15 9BG

DRAWING TITLE

SECOND FLOOR STRUCTURE

Metal-web joists on wall plates + LB stud walls, SF opening, binder, kneewall plate

SCALE	SIZE	DATE
AS SHOWN	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-075-FL-02	-

Do not scale. All dimensions in mm. Check all dimensions on site.