
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 external walls, GF + FF to the wall plate, ICF on the slab, plus the front gables - pre-cut by BuildEase, stock forms and accessories by the distributor. The slab, floors, steels, stairs, roof, partitions, windows, chimney and porch are DESIGN ASSUMPTIONS drawn in good faith for coordination only (England - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

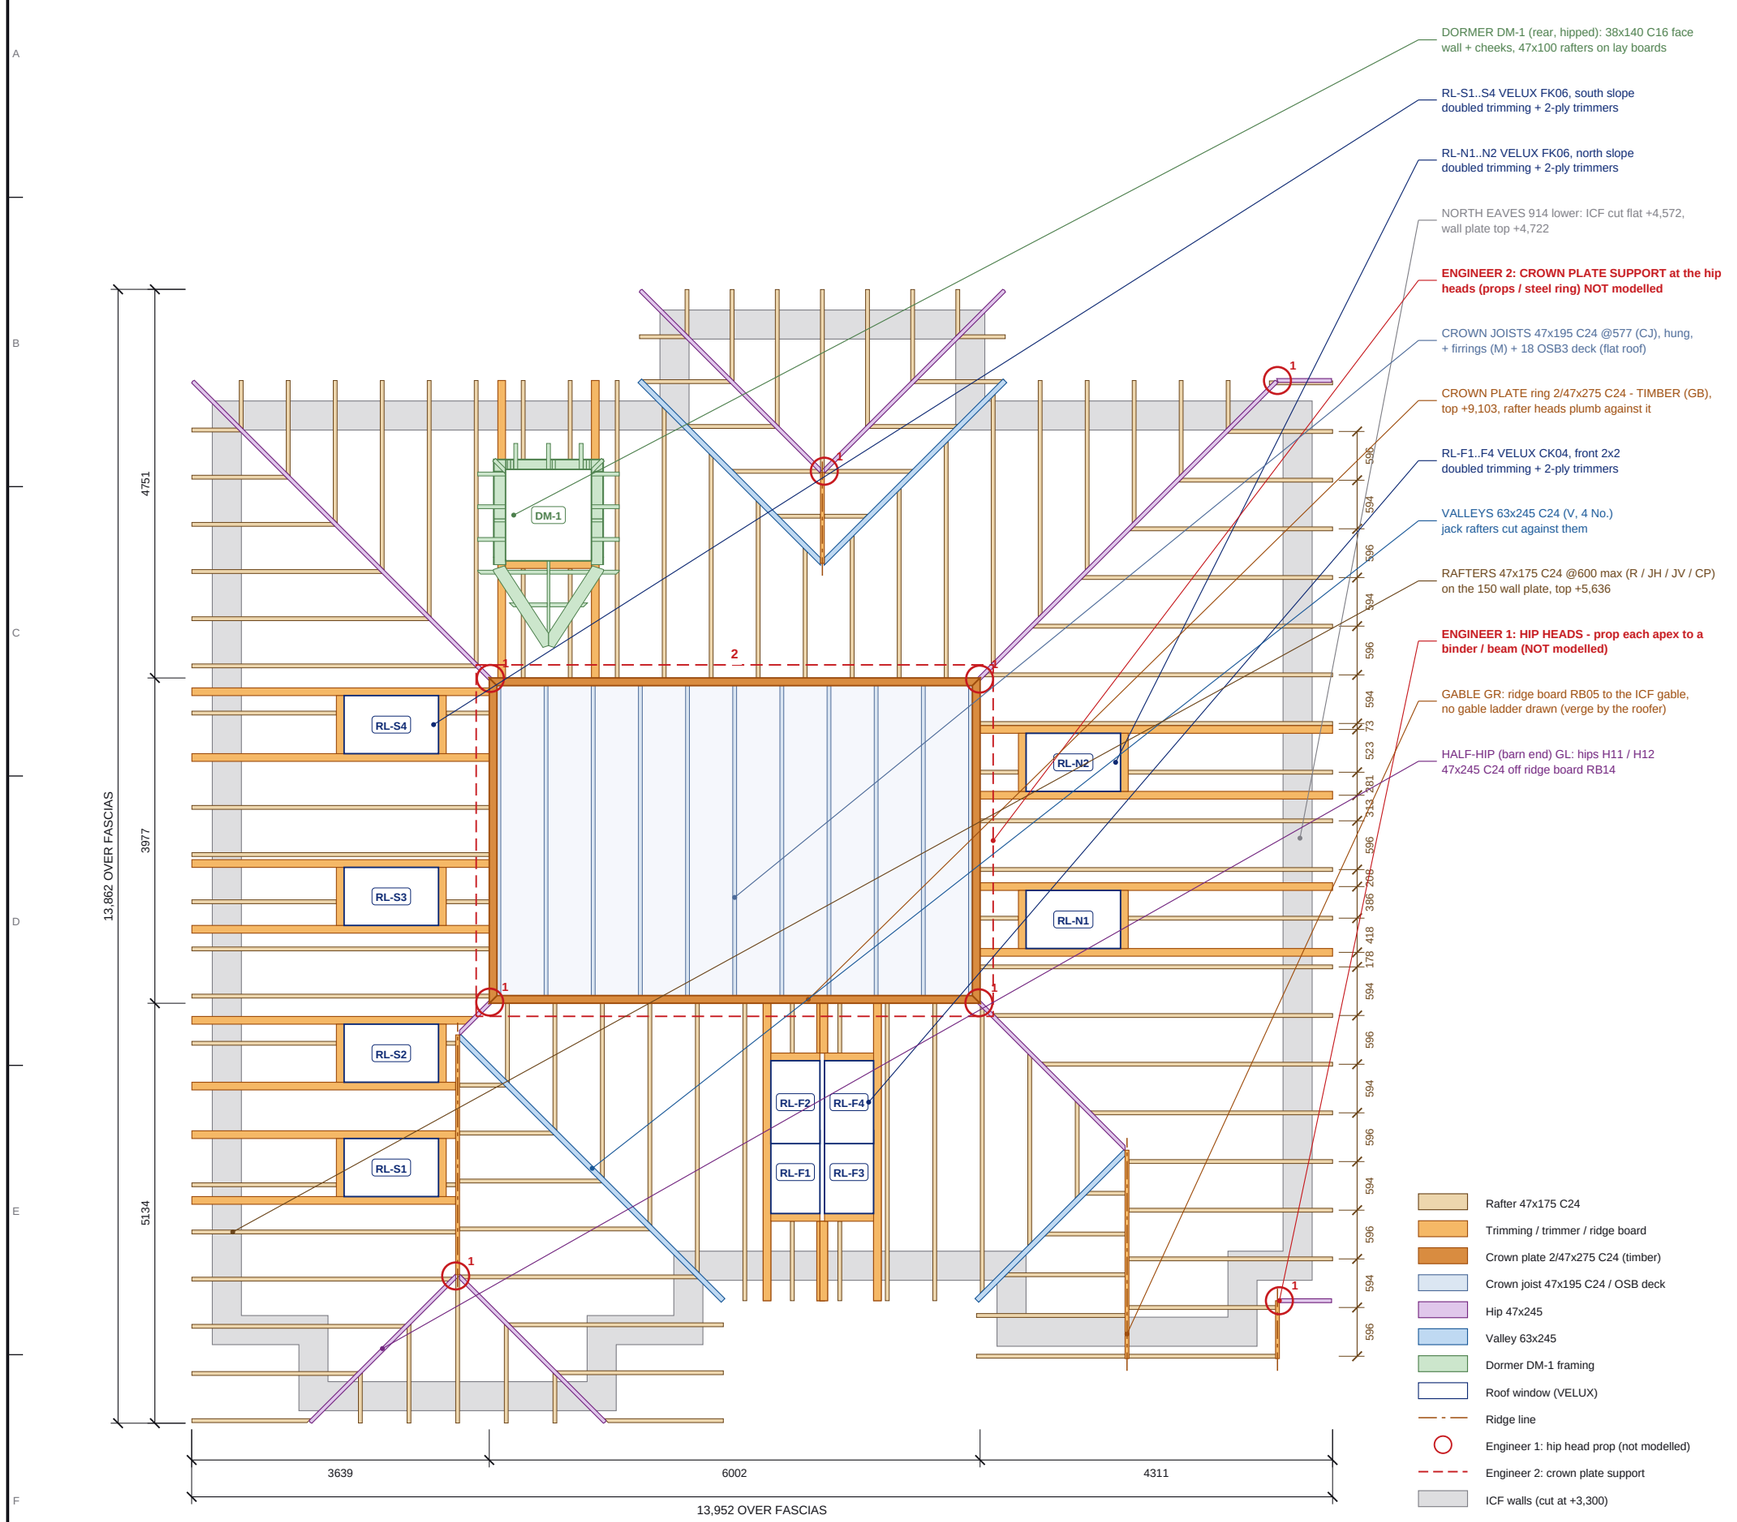

ROOF STRUCTURE PLAN

Scale 1:75 @ A3 | Plan on the rafters and crown, tiles / battens / membrane omitted

Do not scale. All dimensions in mm. Check all dimensions on site.

ROOF STRUCTURE SCHEDULES

ROOF MEMBER SCHEDULE

Mark	Member	Section	Length	Qty
GB	Crown plate ring (TIMBER, flat crown)	2/47x275 C24	3,977-6,002	4
CJ	Crown joist, hung off the crown plates	47x195 C24	3,789	11
M	Firring, tapered to the fall	47x27-122	3,789	11
M	Crown deck 18 OSB3 T&G (m2)	18 OSB3 deck	-	23.9
H	Hip rafter	47x245 C24	670-6,299	10
V	Valley rafter	63x245 C24	3,187-5,628	4
RB	Ridge board	47x200 C24	707-2,932	4
R	Common rafter	47x175 C24	2,602-6,096	20
JH	Jack rafter, plate -> hip / trimmer	47x175 C24	816-6,042	58
JV	Jack rafter, valley -> ridge / hip	47x175 C24	264-3,355	13
TR	Trimming rafter (doubled), roof window	2/47x175 C24	927-6,096	26
T	Trimmer, roof window head + sill	2/47x175 C24	600-1,050	22
CP	Cripple rafter (above / below / valley)	47x175 C24	729-5,005	29
DM1	DM-1 rafters, jacks, crown 47x100	47x100 C24	434-920	13
DM1	DM-1 hip rafters	47x150 C24	779	2
DM1	DM-1 ridge board	32x150 C24	1,571	1
DM1	DM-1 lay boards on the main rafters	150x32 C24	997	2
DM1	DM-1 face fillet (45 deg)	140x165 C24	1,330	1
DM1	DM-1 plates, studs, noggins C16	38x140 C16	140-1,330	30
DM1	DM-1 lintel packer	24x140 C16	926	1
DM1	DM-1 lintel	3/38x140 C16	926	1
	Total members (excl. decks, sheathing, insulation)			**263**

Cut lengths from the model (min-max). 2/.. = 2-ply. Deck in m2. GB = crown plate (timber). DM-1 also 9 OSB3 sheathing + 120 MW.

ROOF WINDOW + DORMER OPENINGS

Mark	VELUX	Hole x / y
DM-1	dormer opening	1,050 x 1,118
RL-F1	CK04 550x980	600 x 1,013
RL-F2	CK04 550x980	600 x 1,013
RL-F3	CK04 550x980	600 x 1,013
RL-F4	CK04 550x980	600 x 1,013
RL-N1	FK06 660x1180	1,155 x 710
RL-N2	FK06 660x1180	1,155 x 710
RL-S1	FK06 660x1180	1,155 x 710
RL-S2	FK06 660x1180	1,155 x 710
RL-S3	FK06 660x1180	1,155 x 710
RL-S4	FK06 660x1180	1,155 x 710

Plan hole between the trimmers. RL-S south, RL-N north, RL-F front slope; DM-1 rear dormer.

NOTES

1. Cut roof as modelled for the quotation (TLS roof framer, flat-top form): 45 deg, plain clay tiles, rafters 47x175 C24 at 600 max, seated on the 150 wall plate on the ICF (plate top +5,636; NORTH eaves 914 lower, plate top +4,722). Hips + valleys 47x245 / 63x245 C24, ridge boards 47x200 C24.
2. Half-hip (barn end) on the left front gable GL (hips H11 / H12, ridge RB14); gable GR verge on the ICF gable (no ladder drawn - verge by the roofer); hipped rear projection; rear hipped dormer DM-1 (38x140 C16).
3. Flat crown: 2/47x275 C24 crown plate ring - TIMBER, not steel (top +9,103), 11 No. 47x195 C24 crown joists @577 hung off the crown plates (they tie the ring), tapered firrings (25 min fall), 18 OSB3 T&G deck glued + screwed at 300 c/c. Flat-roof membrane + edge details by others.
4. Roof windows: 10 No. VELUX - RL-S1..S4 FK06 (south slope), RL-N1..N2 FK06 (north slope), RL-F1..F4 CK04 (front 2x2 over the stair void): doubled trimming rafters each side, 2-ply 47x175 head + sill trimmers on hangers, cripples above / below.
5. ENGINEER ITEMS - NOT MODELLED (framer warnings): (1) HIP HEADS: 10 hips - where hips meet the ridge, each other or the crown the apex needs a prop to a binder / beam. (2) CROWN PLATE SUPPORT: the plate carries the rafter heads round the ring - support it at the hip heads (props / steel posts) or make it a steel ring; the crown joists tie it.
6. INDICATIVE - ENGLAND (Approved Document A): loads, sizes, straps, holding down + bracing to the engineer. Levels above GF FFL, mm.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
ICF Supplies Ltd (distributor) - Tom Barrett	Plot 1, The Rectory, Bates Hill, Ightham TN15 9BG

DRAWING TITLE

ROOF STRUCTURE

Rafters, hips, valleys, flat crown, half-hip, dormer, roof window trimming

SCALE	SIZE	DATE
1:75	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-075-RF-01	-