

SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 external walls, GF + FF to the wall plate, ICF on the slab, plus the front gables - pre-cut by BuildEase, stock forms and accessories by the distributor. The slab, floors, steels, stairs, roof, partitions, windows, chimney and porch are DESIGN ASSUMPTIONS drawn in good faith for coordination only (England - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

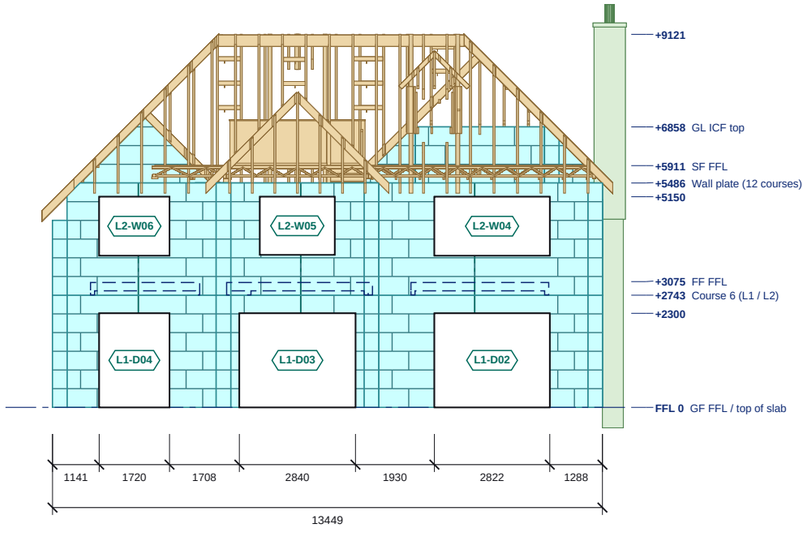

REAR (WEST) ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

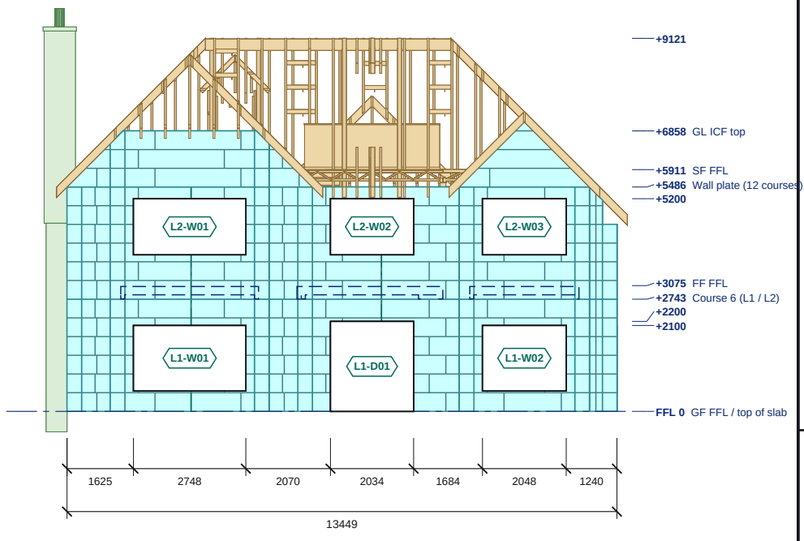

FRONT (EAST) ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

0 1 2 3 4 5 6 7 8m

ICF external EPS face
Block course joint
Stack joint

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

REAR (WEST) ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-D03	2840	2300	0	+2300	-
L1-D02	2822	2300	0	+2300	-
L1-D04	1720	2300	0	+2300	-
L2-W05	1830	1420	+3730	+5150	-
L2-W04	2822	1440	+3710	+5150	-
L2-W06	1720	1440	+3710	+5150	-

Structural openings in the ICF; sill and head above GF FFL.

FRONT (EAST) ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-W01	2748	1600	+500	+2100	-
L1-W02	2048	1600	+500	+2100	-
L1-D01	2034	2200	0	+2200	-
L2-W01	2748	1370	+3830	+5200	-
L2-W03	2048	1370	+3830	+5200	-
L2-W02	2034	1370	+3830	+5200	-

Structural openings in the ICF; sill and head above GF FFL.

REAR (WEST) ELEVATION: LEVELS

Level	FFL
GF FFL / top of slab	0
top of ICF	+2300
Course 6 (L1 / L2)	+2743
FF FFL	+3075
top of ICF	+5150
Wall plate (12 courses)	+5486
SF FFL	+5911
GL ICF top	+6858
top of roof build-up	+9121

FRONT (EAST) ELEVATION: LEVELS

Level	FFL
GF FFL / top of slab	0
top of ICF	+2100
top of ICF	+2200
Course 6 (L1 / L2)	+2743
FF FFL	+3075
top of ICF	+5200
Wall plate (12 courses)	+5486
SF FFL	+5911
GL ICF top	+6858
top of roof build-up	+9121

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-075-GA-01 for plan setting out, lintels and steel.
5. Datum: 0 = GF FFL / top of slab (ICF starts on the slab, no footing blocks).
6. From Offset Architects 9172-SK10 Plot 1 Plans and Elevations (PRELIMINARY, July 2026).

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
ICF Supplies Ltd (distributor) - Tom Barrett	Plot 1, The Rectory, Bates Hill, Ightham TN15 9BG

DRAWING TITLE

FRONT AND REAR ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:150	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-075-EL-01	-